



Classic Standard Series




Where function meets style



ABBOTSFORD
CONCRETE PRODUCTS

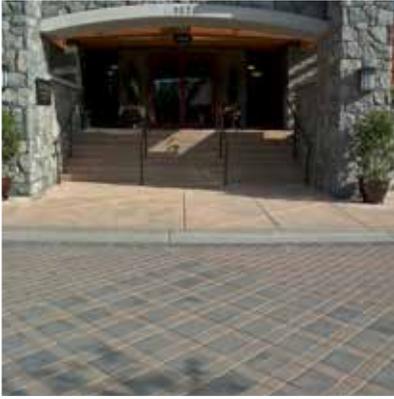

Our Classic Standard Series is the ultimate in adaptive design! Pattern selections range from a traditional cobblestone to sleek, contemporary style that demands attention.

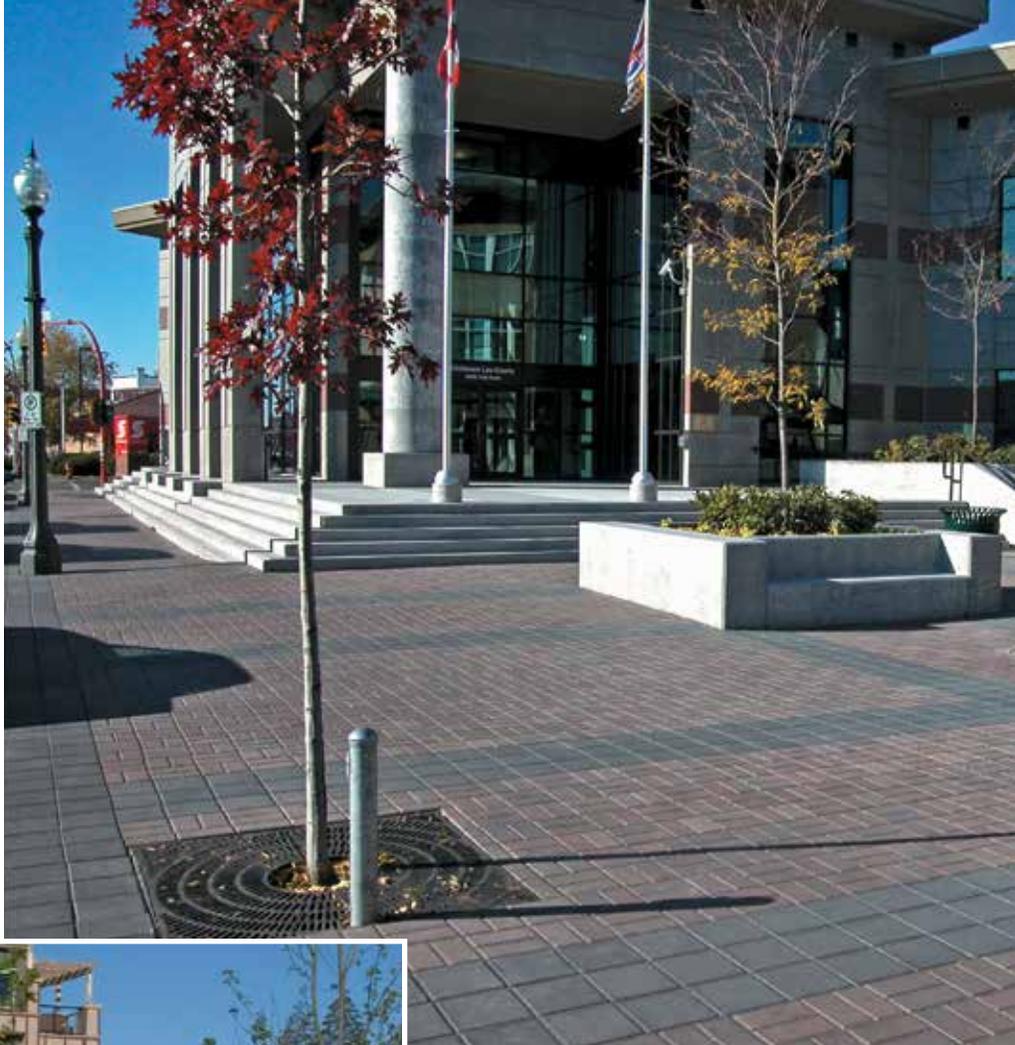

*Our pavers are made with the unique **PermaFinish** two layer process. In this process, the wearing surface of the paver is composed of uniformly graded hard, sharp granite aggregate, high cement content and a correspondingly high pigment content. This results in a dense high strength surface, more intense color stability and greater abrasion resistance than traditional paving stones. The balance of the paver is composed of high strength compressed concrete.*

Unsealed



Natural*

Sealed**



Unsealed



Shadow* Blend


Sealed**



Red*



Red/Black* Blend



Desert Sand* Blend



Sand/Brown* Blend



Charcoal*



Brown*



Indian Summer* Blend

California and Nevada available in limited stock colors.


While the colors shown here are represented as accurately as possible, they should only be used as a guide. Actual samples should be viewed before making a final color selection.

**For best results, pavers should be installed from several pallets to ensure color consistency, especially with multi-color blends.*


***'Sealed' pavers in this brochure have received an acrylic sealer, which is recommended to help with maintenance and to protect them against staining. Sealing is done post installation.*

At Abbotsford Concrete, custom colors can be special ordered to help you make a design statement for that unique project.

Available in a wide range of colors, shapes and patterns, the Classic Standard Series provides you with a variety of possibilities, limited only by your imagination to create the right look.

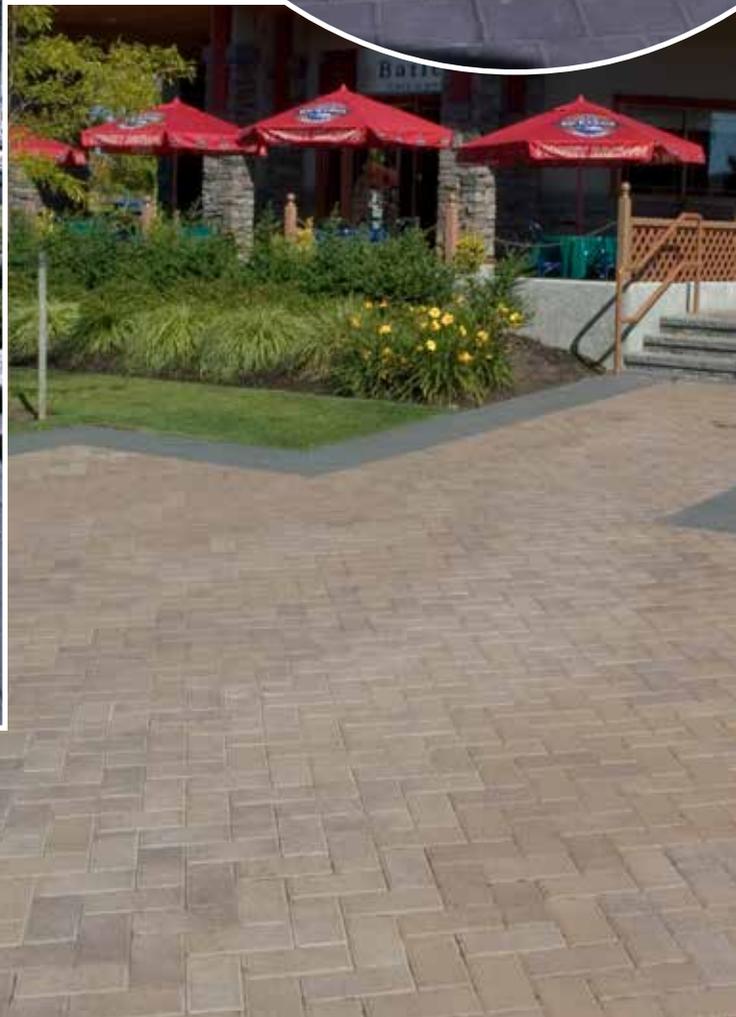



Visit our website at
www.pavingstones.com
for our complete product guide,
design details and photo gallery.

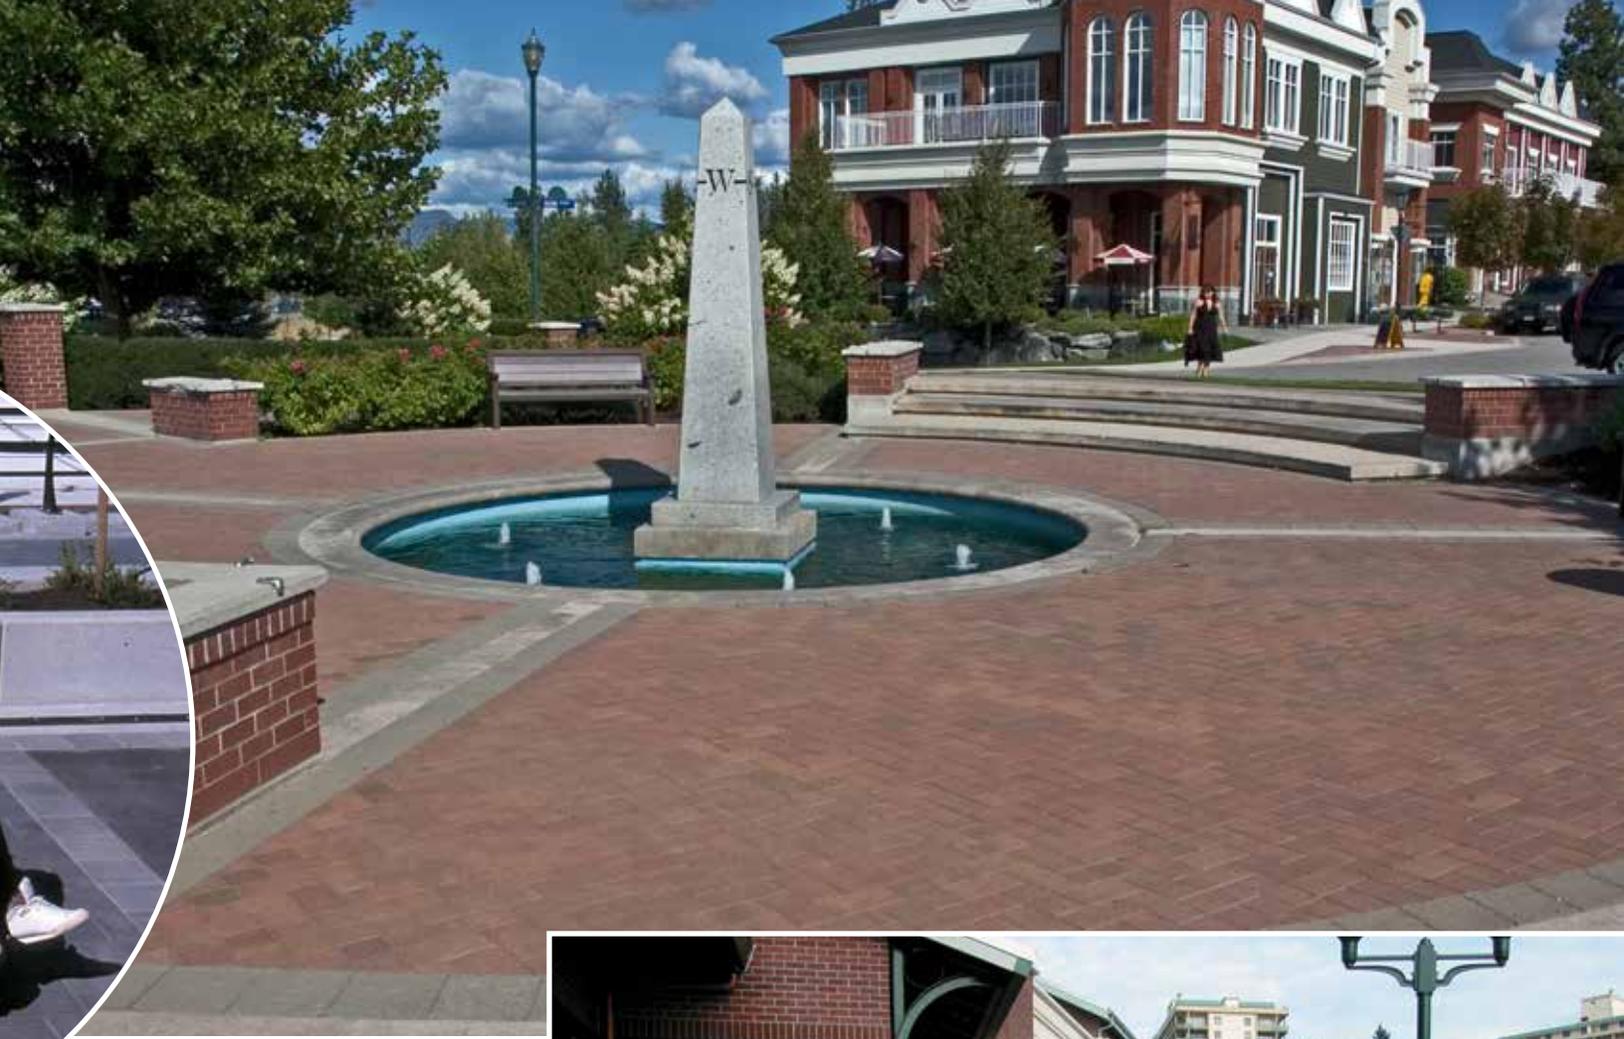



*1999 Interlocking Paver Award winner:
City Hall revitalization project
- Oakland, California.*

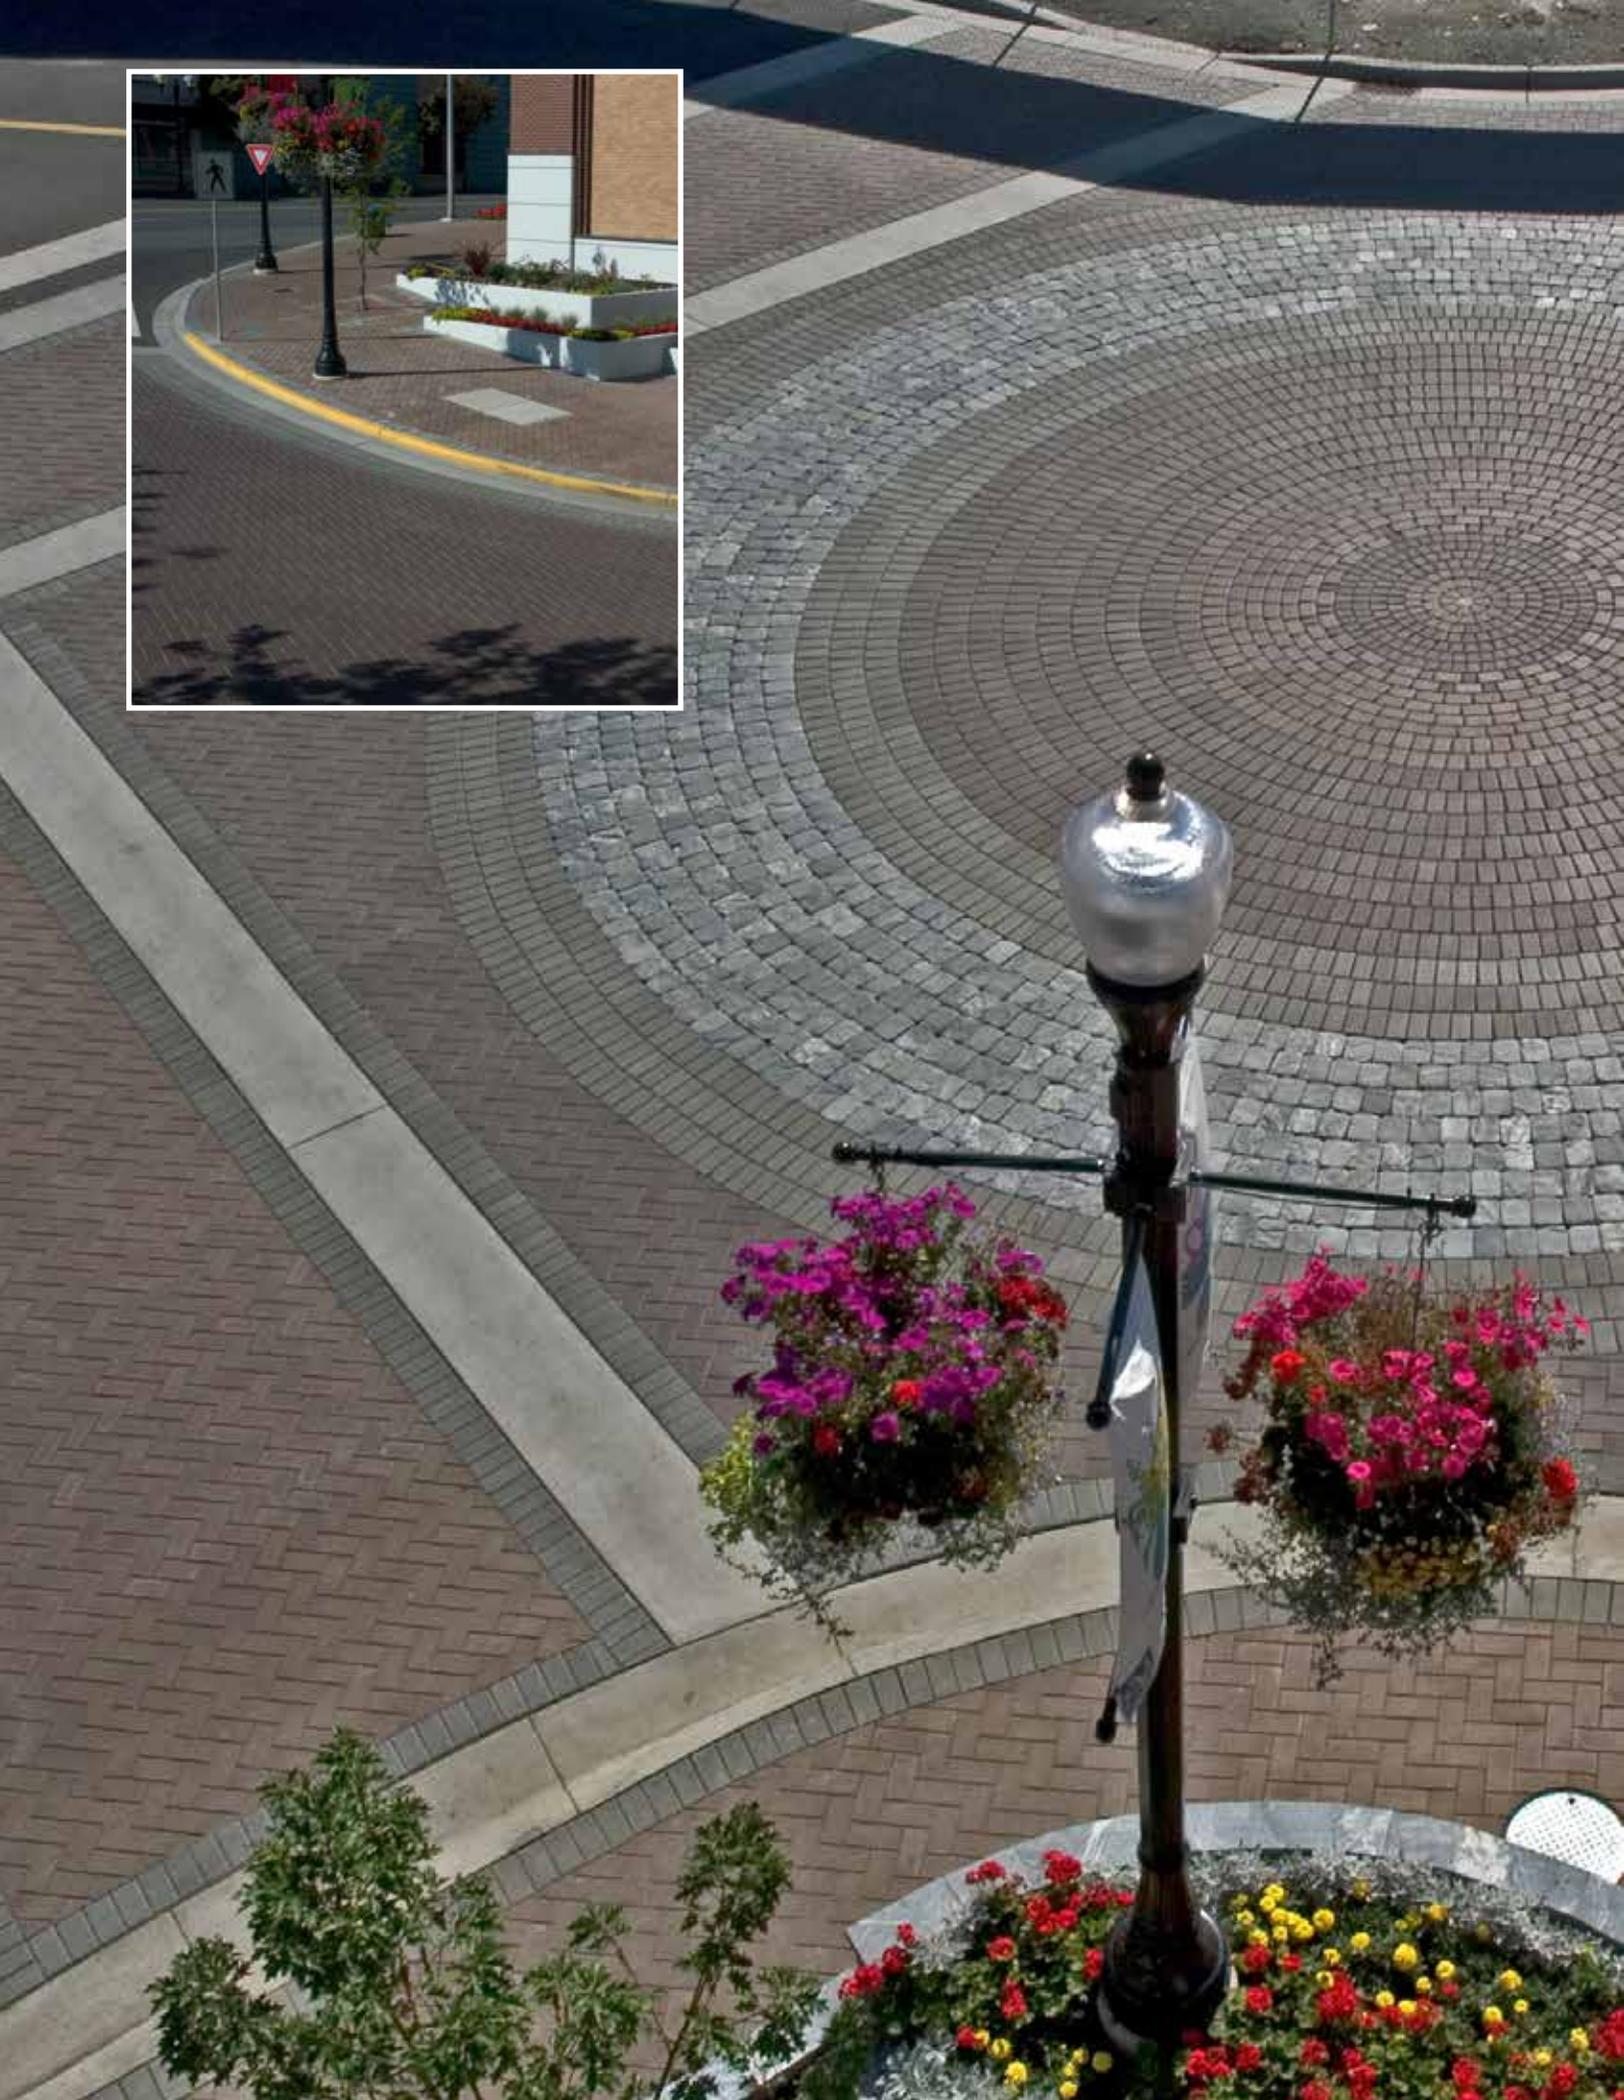

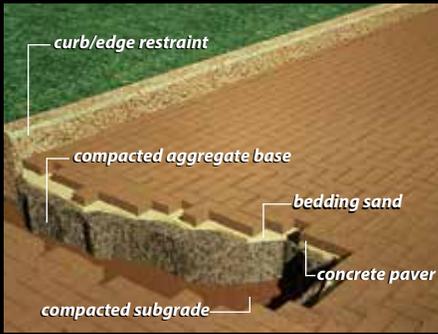

How to get a professional look.

1. Compact and level the sub-base.
2. Backfill with 4" to 10" (50-250mm) of 3/4" minus road mulch or equivalent compacted granular fill.
3. Spread 1" (25mm) of concrete sand over fill. Avoid walking on the prepared base as this may cause the finished surface to be uneven.
4. Place STANDARD pavers in the desired pattern close together. The spacing should be consistent to help maintain a uniform pattern. Pavers can be cut to fit with a paver cutter or masonry saw.
5. Tamp down pavers with a mechanical vibrator until level and firmly in place.
6. Fill joints completely by sweeping Abbotsford Concrete's joint sand across the surface, then compacting until joints are completely filled. The area is now ready for immediate use.

Specifications:

ABBOTSFORD CONCRETE PRODUCTS


Pavers are manufactured to ASTM C 936 and
CSA A231.2-14 specifications,
HydraPressed Slabs to CSA A231.1-14 specifications.

Concrete strength: 8000 PSI (55 MPA)

Absorption: shall not exceed 5%

Weight: 2-3/8" (60mm): approx. 28lbs/ft² (140kg/m²)
3-1/8" (80mm): approx. 37lbs/ft² (182kg/m²)


Sizes and Specifications



Half Standard

Half Standard

Length: 4-7/16" (112.5mm)
Width: 4-7/16" (112.5mm)
Area: 7.3 stones /ft²
78.5 stones /m²
Thickness: 2-3/8" (60mm)




Standard & Standard II

Standard & Standard II

Length: 8-7/8" (225mm)
Width: 4-7/16" (112.5mm)
Area: 3.7 stones /ft²
40 stones /m²
Thickness: 2-3/8" (60mm)

Regular finish also available
in 3-1/8" (80mm)

Standard II is a special order




Double Standard

Double Standard

Length: 8-7/8" (225mm)
Width: 8-7/8" (225mm)
Area: 1.8 stones /ft²
20 stones /m²
Thickness: 2-3/8" (60mm)

Regular finish also available in
3-1/8" (80mm) as a special order




3:1 Standard

3:1 Standard

Length: 8-7/8" (225mm)
Width: 2-15/16" (75mm)
Area: 5.4 stones /ft²
60 stones /m²
Thickness: 2-3/8" (60mm)

3:1 Standard is a special order

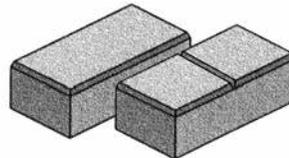


Californian & Californian II

Californian & Californian II

Length: 11-7/8" (301mm)
Width: 5-15/16" (151mm)
Area: 2 stones /ft²
21.4 stones /m²
Thickness: 2-3/8" (60mm)
3-1/8" (80mm)


Californian and Californian II are a special order



Nevada

Length: 11-7/8" (301mm)
Width: 11-7/8" (301mm)
Area: 1 stones /ft²
7.4 stones /m²
Thickness: 2-3/8" (60mm)

Nevada is a special order



Sierra


Length: 15-3/4" (401mm)
Width: 15-3/4" (401mm)
Area: .6 stones /ft²
6.2 stones /m²
Thickness: 3-1/8" (80mm)

Sierra is a special order

Visit our website at

www.pavingstones.com

for our complete product guide,
design details and photo gallery.
or call toll free 1-800-663-4091



ABBOTSFORD
CONCRETE PRODUCTS